

AMP-13

3 PHASE AMPERE METER



TECH SPECS

Dimension (HxWxD) mm	96 x 96 x 43
Panel Cutout	92 x 92
Mounting	Panel Mounting
Input Current	0.1 to 5Amp AC
Accuracy	Class 0.5
Power Supply	100 to 270V AC,50/60Hz, 4VA
Certification	CE

APPLICATIONS

- DG Set Panels
- Motor Control Center Panels
- Control Panels
- Distribution Panels

Technical Specifications

Calculated Parameters

Current	Three phase current
---------	---------------------

Input

Direct Current	0.1 to 5Amp AC
Primary CT	5 to 9999 Amp (Selectable)
Secondary CT	5 or 1Amp (Selectable)

Physical

Mounting Type	Panel Mount
Size (H x W x D)mm	96 X 96 X 43
Front Bezel (H x W) mm	96 X 96
Panel Cutout(mm)	92 X 92
Depth Behind panel(mm)	43
Material	Front: PC Back: ABS
Accessories	2 Panel Mounting Clamp

Auxiliary Power Supply

Power Supply	100 to 270V AC,50/60Hz
--------------	------------------------

Display, LED & Keys

Display	0.8" Red LED, 4 digit
Key	SET/ENT, INC, DEC
LED Indication	Line-1,Line-2,Line-3,& Avg

Accuracy

Class 0.5 (Standard)


Environmental

Operating Temperature	0 to 55 °C
Storage Temperature	0 to 70 °C
Humidity	95% RH Non-condensing

Mechanical Dimension

Outline Dimension (mm)	Panel Cutout Dimension (mm)

Connection Diagram

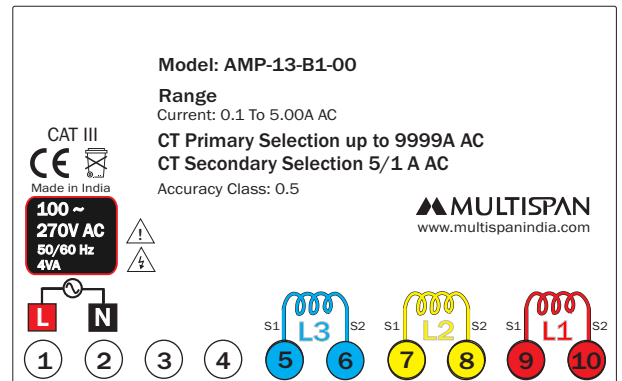

Multispan reserves the right to change specifications without prior notice. Printing and typographical errors reserved.
Product improvement and upgrade is a constant procedure. So for more updated operating information & support contact us.

Multispan Control Instruments Pvt. Ltd.

72/B,Phase 1, GIDC Estate,Vatva,Ahmedabad-382445,Gujarat,India.

+91-7575805463/7623001206

support@multispanindia.com

Follow us



www.multispanindia.com