



REAL TIME CLOCK

RTC- 1048

TECH SPECS

Model	RTC 1048
Dimension (HxWxD) mm	96 x 96 x 52
Panel Cutout	92 x 92
Range	23:59:59 Hrs/Min/Sec
Output	1 Relay 1 C/O
Power Supply	100-270V AC, 50/60 HZ

APPLICATIONS

Street Light

Garden Light

Signages/Hoardings

Escalators

Automation Light

Technical Specifications

Physical	
	RTC-1048
Color	Black
Front Bezel (mm)	96 x 96
Panel cutout (mm)	92 x 92
Depth behind panel	52 mm
Accessories	1 pair of Mounting clamp
Terminal Cable Size	Barrier Type terminal Cable Size (2.5 mm ²)

Power Supply	
Standard	100 - 270V AC @ 50/60 Hz
Consumption	5VA


Program
16 Program ON/OFF Time

Mechanical Dimension	
Outline Dimension (mm)	Panel Cutout Dimension (mm)

Output	
Relay Control Output	
Relay	1 Nos.
Rating	5A @230V AC / 28V DC Resistive Load

Display	
Process Value	Upper : 8 Digit 7 seg 0.39",Red LED Display Lower : 4 Digit 7 seg 0.39",Green LED Display
Keys	SET, SHIFT, UP, ENT/RESET
LED Indication	Relay Indication

Environmental	
Operating Temperature	0 to 55 °C
Storage Temperature	0 to 70 °C
Humidity	95% RH Non-condensing
Protection	IP 54 (Front Side)

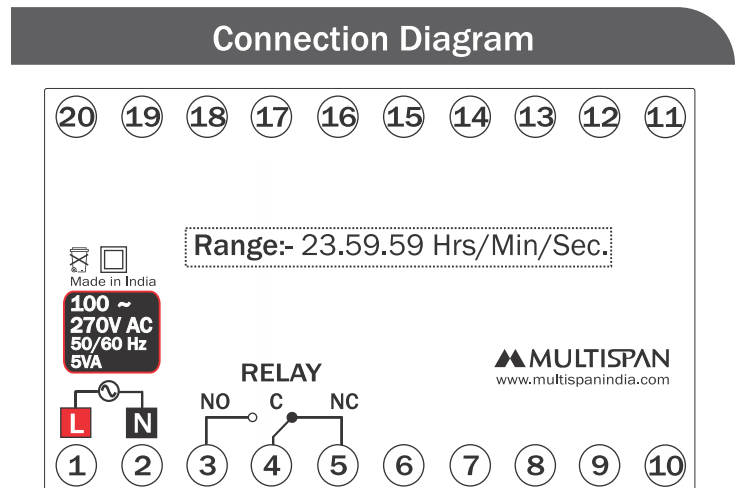

Multispan reserves the right to change specifications without prior notice. Printing and typographical errors reserved. Product improvement and upgrade is a constant procedure. So for more updated operating information & support contact us.

Multispan Control Instruments Pvt. Ltd.

72/B,Phase 1, GIDC Estate,Vatva,Ahmedabad-382445,Gujarat,India.

+91-7575805463/7623001206

support@multispanindia.com

Follow us



www.multispanindia.com