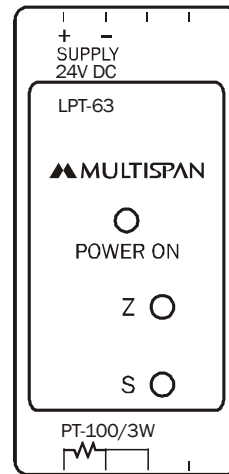


**SPECIFICATION**

1. Size: 76 X 27 X 116 mm.  
Mounting: Din rail mounting.
2. Supply: 24V DC (2Wire System)
3. Accuracy:  $\pm 0.5 \%$ .
4. Input: PT-100/3W type RTD.
5. Output : 4 To 20mA DC
6. Range: 0°C To 400°C

**WORKING**

- ◆ Do all connection as shown in connection diagram and turn on the instrument.
- ◆ When power is turned on, RED LED turns ON.
- ◆ 4-20 mA output is available on the supply terminal according to the signal coming from PT-100/3W.
- ◆ At 0 °C, 4 mA Output is available and at 400 °C, 20 mA Output is available.

**CONNECTION DIAGRAM**